

## LAMINATRICE COMBI SALDATURE CIRCOLARI E RETTILINEE

LAMINATRICE COMBI SALDATURE 1500/160 – 5 TONN.

Lunghezza massima lamiera, 1500 mm.

Diametro minimo lavorabile,  $\varnothing$  160 mm per 1150mm,  $\varnothing$  350mm fino a 1500mm.

Forza massima sul rullo pressore 5000 Kg.


Luce slitta rullo pressore, 60 mm.

Unità di laminazione superiore motorizzata con variazione velocità a mezzo inverter, da 3 a 15 m/min.

La macchina può lavorare le saldature longitudinali o circolari, ruotando la parte superiore e sostituendo quella inferiore.

Rulli pressori per saldatura longitudinale sagomati, due coppie, e una per le circolari.

Comandi su colonnina e pedaliera.

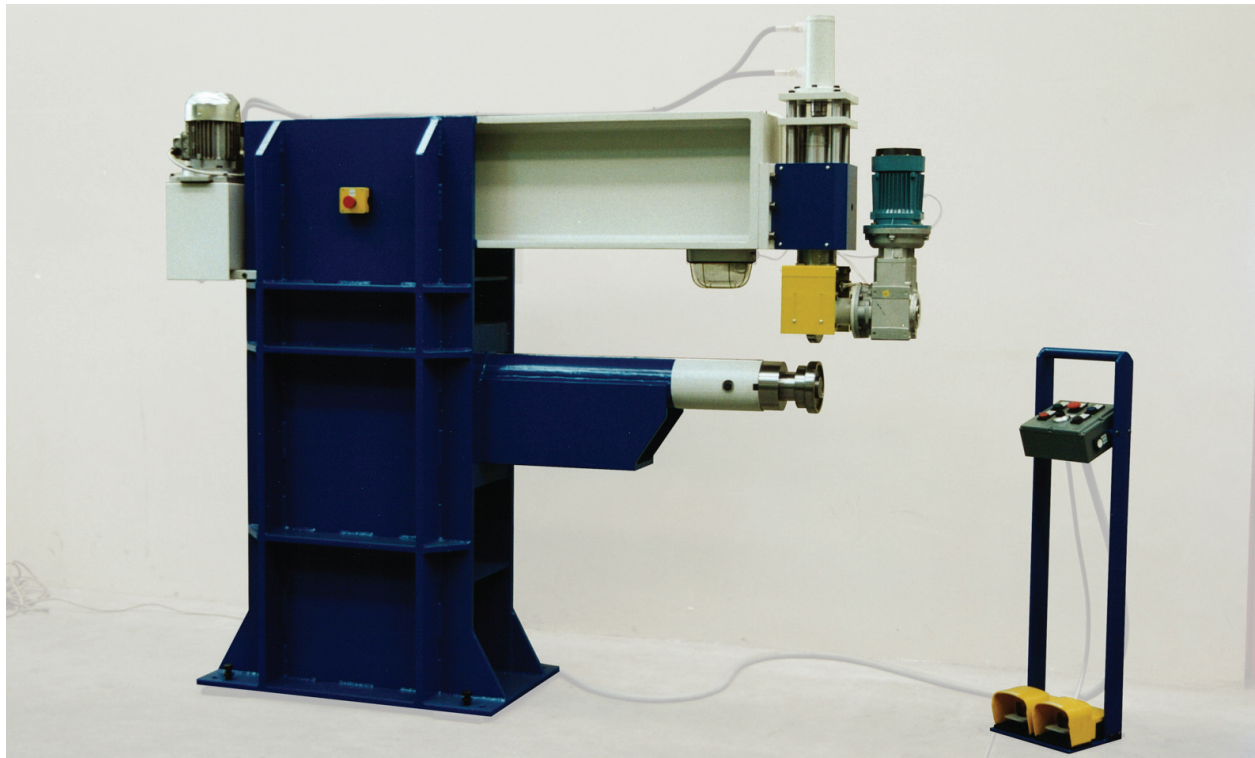

## COMBI PLANISHER FOR CIRCULAR AND STRAIGHT SEAM WELDS

COMBI PLANISHER FOR WELDINGS 1500/160 –5 TONN.

Max length of the sheet/tube, 1500mm.

Min diameter,  $\varnothing$  160 mm x 1150 mm,  $\varnothing$  350 mm up to 1500mm.

Maximum force on pressure roller, 5000 Kg.

Max distance between rollers, 60 mm.

Motorized upper roller with adjustable speed from 3 to 15 m/min.

The machine is designed to work seam and circular welds, rotating the upper part and replacing the lower one.

Shaped pressure rollers for seam welds (two couples + one couple for circular welds).

Controls on column and pedal.

